



Description

The new and improved one-inch RTX sensor is the latest addition to the legendary AquaMetrix differential sensor family. Our smart sensors maintain their robust design, but leverage the analytical power of our controllers, fully integrated. The 1" TX version also comes in distinctive blue PPS (Ryton®) for superior resistance to chemical and mechanical weathering.

The advantages of digital output sensors are compelling. They include reduced noise, higher immunity from stray voltages, calibration stored in the sensor, and the elimination of intermediary transmitters.

The new TX-series incorporates all the benefits of differential measurement found in other models of the 60 and 65 series, field-proven in thousands of installations.

The replaceable salt bridge has been completely redesigned for this series - no special tools are required! Simply grab a #3 Philips screwdriver or 1/2" wrench and rejuvenate your sensor in seconds.

The universal gold flat-faced glass process electrode is specially designed for tough applications. A larger surface area guarantees quick readings and outstanding performance, and a self-cleaning flush fit when installed inline ensures upkeep will be minimal. The process electrode is encased in a protective layer of PPS offering

increased resistance to physical damage.

Aquametrix ORP sensors are designed to simply and reliably ensure water quality compliance. Aquametrix ORP sensors provide accurate measurements under conditions that often render conventional ORP sensors inoperable.

Differential measurement technology uses two glass electrodes to make the measurement differentially with respect to a third metal electrode. The resulting true differential measurement has several advantages over conventional sensors: ground loop problems are virtually eliminated and the sensor can be restored to factory condition at modest cost by replacing the salt bridge and reference solution.

The temperature device is improved through the use of a thermistor at the tip of the probe, providing rapid response for process temperature variations.

The sensor is compatible with any off-the-shelf 1" NPT fittings and serves as a drop-in replacement in fittings designed for the previous iteration.

You no longer need to sacrifice precision for longevity with Aquametrix TX Sensors.

Features

- Low cost of ownership
- Stable and Repeatable performance
- Flat face electrode is standard
- Industrial Grade Quality
- Chemically resistant PPS body
- Universal style: flow-through and submersion
- Analog (4-20 mA) or Digital (RS485) Output
- Replaceable Salt Bridge
- Gold

Applications

- Process Control
- Industrial and Municipal Waste Treatment and Neutralization
- Fume Scrubbers
- Plating
- Circuit Board Manufacturing
- Mining
- Power Generation
- Food and Beverage
- Aquaculture
- Agriculture

**Smart Inside.
Tough Outside.**

AquaMetrix
by  Water Analytics

100 School Street
Andover, MA 01810

978-749-9949

Toll free 855-pH Probe
(855-747-7623)

www.WaterAnalytics.net


N110-160 R1

RTXR5 pH Differential Smart Sensor

Technical Data

Measuring Range	-1000 to + 1000 mV Digital Analog (4-20mA) range selectable	Stability	2.0 mV per day, non-cumulative
Wetted Materials	Ryton® (PPS), Ceramic, Glass, Viton®, Titanium, *PVC (cable jacket), *San- toprene® 101-55 (strain relief) *when fully submerged	Sensitivity	0.1 mV
Temperature Limits	23 to 167°F (-5 to 75°C) at atmospheric pressure	Accuracy	± 5 mV
Maximum Pressure	100 psig at 150°F (65°C)	Sensor Cable	Default length 15 ft (4.5m) 2-wire Analog 2-wire RS485 1-wire ground
Maximum Flow Rate	10 ft. (3 meters) per second		
Temperature	Available via digital output		

Dimensions

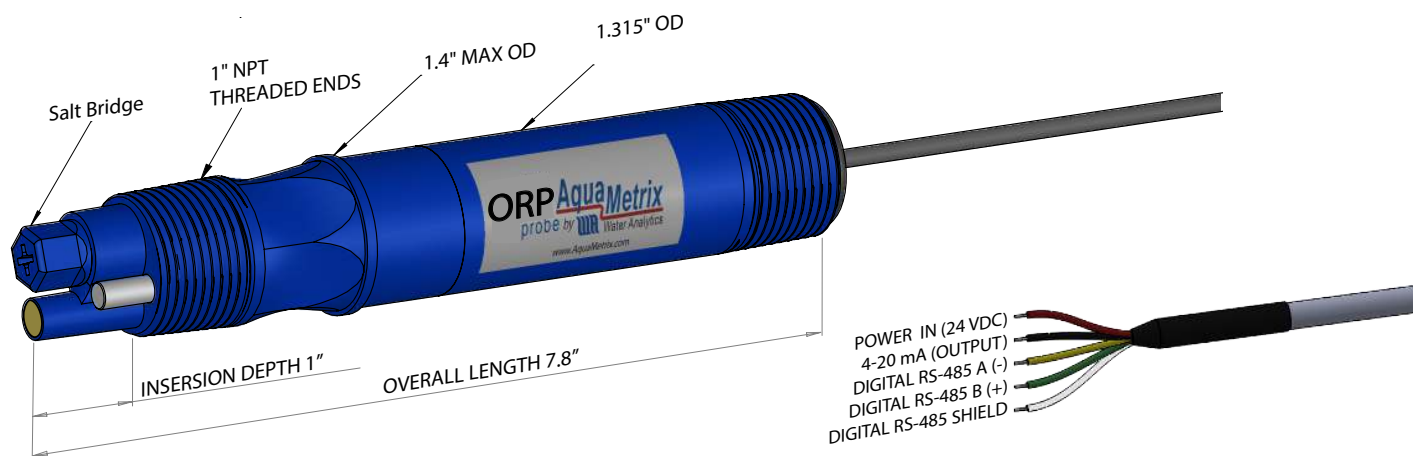

Related Products

ANALYZERS

AM-2300 Multi-Input Controller

ACCESORIES

AM-SBK3-R5 Salt bridge kit (3 pack) for R5 sensor
AM-SBK10-R5 Salt bridge kit (10 pack) for R5 sensor
AM-CFT-R5 1.5" compression fitting for R5 sensor
AM-TEE-5 2" Union TEE with quick disconnect adapter
AM-ARM-5 Submersion Arm
AM-PTR-5 Electrode Protector
AM-JET-5 Jet Cleaner
AM-SFL-5 2" Sanitary Flange
AM-JB2 NEMA 4X Junction Box
AM-CBL Universal Extension Cable

Ordering Information

RTXR5-015 Smart Analog output (4-20mA) or Digital (RS485) industrial differential ORP sensor for flow-through or submersion application. Compatible with AM-2300 and any PLC with 4-20mA input. Standard 15 ft cable.

CALIBRATION SOLUTIONS

AM-R200-1P ORP 200mV Standard, 1 pint (500 mL)
AM-R600-1P ORP 600mV Standard, 1 pint (500 mL)